

# SF<sub>6</sub> GAS DENSITY MONITORS FOR INDOOR AND OUTDOOR INSTALLATIONS, FILLED

MODEL: SSPG-100-1

## SPECIFICATIONS

These instruments are manufactured to monitor the electrical operations on hermetically sealed systems containing Sulphur Hexafluoride gas (SF<sub>6</sub>). The indication and electrical operations are calibrated to the gas density (isochore) based on the changes of pressure and temperature relations. The SPG-100 is suitable for indoor installation to meet most of the applications demanded on market.

The oil filled executions are particularly suitable for installations when vibrations are apparent.

Switchgear is hermetically sealed and filled with SF<sub>6</sub> gas. The material properties of SF<sub>6</sub> gas which are essential for such applications, such as the electrical disruptive strength or the electric light arc quenching capability, are dependent on the density of the SF<sub>6</sub> gas. The required SF<sub>6</sub> gas density depends on the respective application. This means that the functional safety of the entire system is strongly dependent on the density of SF<sub>6</sub> gas which is why it must be monitored.



SSPG-100-1

## GENERAL CHARACTERISTICS

### NOMINAL DIAMETERS (mm)

100 (DN100)

### ACCURACY

±1,0% at +20°C of Ambient Temp.  
±2,5% within the Ambient Temperature  
Ranges between -20...60°C related to the calibrated pressure of the reference isochore

### POINTER

Black Aluminum

### RING

Bayonet Lock, Stainless Steel AISI 304 with Antitampering Sealing

### GAS SEAL

Leakage Rate  $\leq 1 \cdot 10^{-8}$  mbar·l/s (Helium Leak Test with Mass Spectrometer)

### RANGES

Vacuum & Compound Gauges from 1,6 to 25 bar

### CALIBRATION PRESSURE

Refer to Order Specifications

### ALARM CONTACTS

Non-Adjustable Contacts with Antitampering Sealing:  
-On Air with Magnetic Block (80%Ag-20%Ni, 10µm Gold-Plated)  
-Maximum Contact Rating with Non-Inductive Ohmic Load, Filled: 20W / 20VA, Maximum 1A  
-Contact Available: Up to 3 Snap Action Non Inductive Contacts

### WINDOW

Safety Glass

### MOVEMENT

Stainless Steel with Bimetallic Temperature Compensator

### DIAL

White Aluminum with Black Markings and Colors Sectors as per Customer's Specification

### WEIGHT

1.2 KG

## TECHNICAL FEATURES

### AMBIENT TEMPERATURE

-20...+60°C

### CASE

Fully Welded Stainless Steel AISI 304  
Filled with Silicon Dielectric Oil  
Leakage Rate  $\leq 1 \cdot 10^{-5}$  mbar·l/s (Helium Leak Test with Mass Spectrometer)  
Hermetically Sealed Design

### PROTECTION DEGREE

IP 65 as per EN 60 529 / IEC 529

### STORAGE TEMPERATURE

-50...+60°C

### PROCESS CONNECTION

Fully Welded Stainless Steel AISI 316  
M20 x 1,5  
G½B Thread (EN 837), SW22

### MEASURING ELEMENT

Welded Stainless Steel AISI 316  
Leakage Rate  $\leq 1 \cdot 10^{-8}$  mbar·l/s (Helium Leak Test)

**ELECTRICAL CONNECTION**

Junction Box with Cable Gland  
M20 x 1,5 – PG 13,5 (2,5 mm<sup>2</sup>)

**INSTALLATION LOCATIONS**

Indoor and Outdoor Installations


**HIGH VOLTAGE TEST**

2 kV, 50Hz, 1s (Internal Circuit)

**OPTIONS & ACCESSORIES**

- Junction Box on the Left
- Contact Adjustment Adjustable
- Removable Junction Box – PG13,5

**DIMENSIONS (MM)**

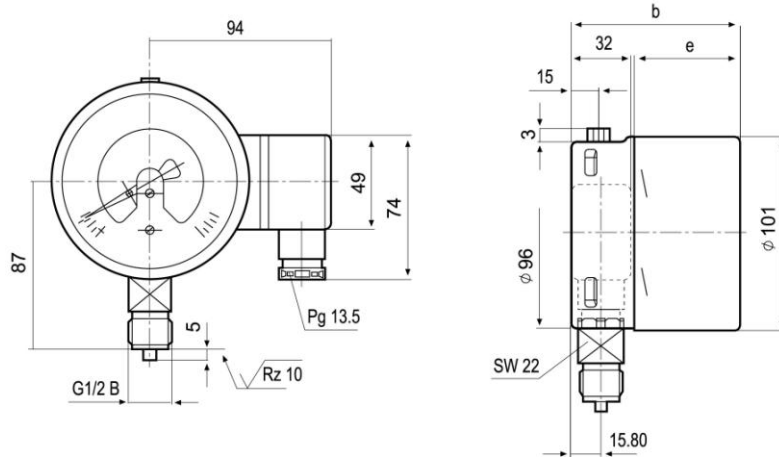

**DIMENSIONS (MM)**

Single/Double Contacts with Isolating Layers  
Triple Contacts with Isolating Layers

	b	e
Single/Double Contacts with Isolating Layers	96	63
Triple Contacts with Isolating Layers	96	63

**POWER RATINGS: MAXIMUM CONTACT RATING**

MAXIMUM CONTACT RATING WITH NON INDUCTIVE (OHMIC LOAD)	MAGNETIC SNAP-ACTION CONTACT	
	GAS FILLED GAUGES	LIQUID FILLED GAUGES
Maximum Voltage (MSR) $U_{eff}$	250 V	250 V
Current Ratings:		
Make Rating:	1,0 A	1,0 A
Break Rating:	1,0 A	1,0 A
Continuous Load	0,6 A	0,6 A
Maximum Load	30 W    50 VA	20 W    20 VA

**RECOMMENDED CONTACT RATINGS**

VOLTAGE (DIN IEC 38) DC / AC	MAGNETIC SNAP-ACTION CONTACT					
	GAS FILLED GAUGES			LIQUID FILLED GAUGES		
	Ohmic Load		Inductive Load $\cos\phi > 0,7$	Ohmic Load		Inductive Load $\cos\phi > 0,7$
V	DC mA	AC mA	mA	DC mA	AC mA	mA
<b>230</b>	100	120	65	65	90	40
<b>110</b>	200	240	130	130	180	85
<b>48</b>	300	450	200	190	330	130
<b>24</b>	400	600	250	250	450	150

Note: Please refer to the user’s manual for detailed maximum power ratings and recommendations.